

TVN-1204C-2T

TruVision NVR 12, 4 channels, 40 Mbps, 2 TB

Reasons for choosing TVN 12

The TVN 12c recorder series offers a full-featured, compact recording solution for IP cameras with a maximum resolution of 8 MP (4K).

The TVN-1204c is a cost-effective, easy-to-use recorder capable of recording up to four IP cameras.

Ease to use


A setup wizard with auto detection of IP cameras guarantees a fast installation of the recorder.

The TVN 12c can be added to the internet without port forwarding or VPN, thanks to the built-in UltraSync connectivity. Showing remote video on mobile applications was never easier.

In combination with dedicated TruVision cameras that can support people and/or vehicle detection, the TVN 12 recorder series can find relevant events faster and without efforts.

Applications

The TVN 12c is the ideal recording solution for small commercial and residential applications, where ease of use and fast deployment time are important.

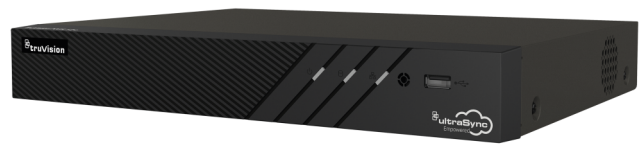

Details

- Linux embedded Plug and Play configuration
- Supports H.264, H.265 and H.265+ encoding, depending on the cameras
- Up to 40 Mbps camera recording bandwidth
- Up to four IP channels with a maximum resolution of 4K (8 MP)
- 2 TB embedded storage
- Real time recording (Up to 4 MP)
- HDMI/VGA monitor output
- TruVision IP camera auto-detection
- IP camera configuration import/export
- UltraSync support for remote access without port forwarding
- Motion detection, VCA, privacy masking and tamper detection
- Dedicated people/vehicle detection in combination with supported cameras
- Third party camera support via ONVIF Profile S or RTSP (custom protocols)
- Integration of Carrier IP intrusion panels via SIA/XSIA reporting
- TVK-600 IP keypad support
- USB DVD burner support
- Full browser-, OSD- and software-based access for live, recorded video & configuration
- TVRMobile app for iOS and Android for remote viewing
- TruVision Navigator license-free client/host or standalone application support
- External integration through SDK

TVN-1204C-2T

TruVision NVR 12, 4 channels, 40 Mbps, 2 TB

Technical specifications

General

| | |
|--------------------|----------------|
| Technology | IP |
| Operating system | Embedded Linux |
| Rack mountable | No |
| Rack stacking size | 1 U |

Video / audio input

| | |
|---------------------------------------|------------------------------------|
| Camera channels | 4 |
| IP camera channels | 4 |
| Max. bandwidth per channel | 16 Mbps |
| Camera bandwidth | 40 Mbps |
| Audio compression | G.711alaw, G.711ulaw, G.722, G.726 |
| Max. IP audio in | 4 |
| Max. analog audio in | 1 |
| Supported video compression standards | H.264, H.265, H.265+ |
| Supported video streaming standards | Onvif, RTSP Custom Protocols |

Local viewing

| | |
|-------------------------------------|-----------------|
| HDMI output | 1 |
| HDMI version | 1.4, 2.0 |
| VGA output | 1 |
| Max. local output resolution | 4K |
| Synchronous playback OSD (channels) | Up to 4 (1080P) |

Remote viewing

| | |
|---|---|
| Total available viewing bandwidth | 80 Mbps |
| Max. live viewing streams | 128 |
| Max. playback viewing streams | 8 |
| Max. simultaneous playback web browser | Up to 8 channels |
| Reverse playback web browser (channels) | Up to 8 |
| UltraSync support | Yes, embedded |
| Software compatibility | Advisor Management Software (ATS8600), TruVision Navigator, TVRmobile |
| Browser compatibility | Google Chrome, Internet Explorer, Mozilla Firefox, Safari |

Storage

| | |
|---------------------------------|---------------------------|
| Storage capacity | 2 TB |
| SATA interfaces | 1 |
| Max. capacity per SATA HDD (TB) | 8 |
| Maximum recording resolution | 4 K |
| Recording modes | Continuous, Event, Manual |
| External storage | NAS |
| Edge failover recording | Yes |

Networking

| | |
|-------------------------------|--|
| Network interface cards (NIC) | 1 |
| NIC type | RJ-45 10/100 Mbps self-adaptive Ethernet interface |
| Total PoE budget | Max. 50 W |
| PoE standards supported | PoE-af, PoE-at |
| Plug & Play PoE support | Yes |
| DNS support | DDNS, ezDDNS, No-IP |
| HTTPS support | Yes |

External interfaces

| | |
|---------------------------|------|
| USB interface back | 1 |
| USB interface front | 1 |
| Serial interface | None |
| Alarm inputs | 4 |
| Alarm outputs | 1 |
| Max. analog audio outputs | 1 |

Electrical

| | |
|-----------------------------------|--|
| Power supply type | 12 VDC |
| Power consumption | PoE model: 65 W (without hard disk) Non-PoE model: 10 W (without hard disk) |
| Power consumption without HDD (W) | ≤10 W |

Physical

| | |
|---------------------|---|
| Physical dimensions | 320 x 240 x 48 mm (W x D x H) with FP: 315 x 236.5 x 47.5 mm |
| Net weight | 1.1 kg |
| Colour | Black |

Environmental

| | |
|-----------------------|-----------------------------|
| Operating temperature | -10 to +55°C 14 to 131°F |
| Relative humidity | 10 to 90% noncondensing |

Regulatory

| | |
|------------|---|
| Compliance | CE, FCC, RCM, REACH, RoHS, UKCA, UL, WEEE |
|------------|---|

GLEXUS

CONTACT

For hygiene products

Phone: +65 6555 3328

Email: sales@glexusbiotech.com

For security products

Phone: +65 6555 2328

Email: sales@glexus.com